


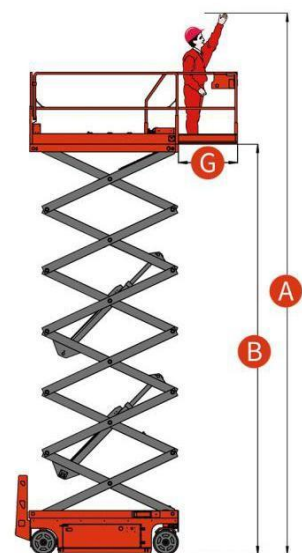




Basic parameters	单位	GTJZ1212HD
Safe working load capacity	Kg	320Kg
Load capacity on the extension	Kg	113Kg
Max.number of workers	/	2
Max.Working height (A)	m	13.8m
Max. Platform height (B)	mm	11.8m
overall length (C)	mm	2480mm
overall width (D)	mm	1190mm
Overall height (unfolded guardrail)	mm	2580mm
Overall height (folded guardrail)) (E)	mm	2050mm
Working platform size (F)	mm	2290*1120mm
Platform extended size (G)	mm	900mm
Min. Ground clearance(stowed state)	mm	100mm
Min. Ground clearance(lifting state)	mm	20mm
Wheelbase	mm	1895mm
Turning radius(Inside wheel)	mm	0m
Turning radius (outside wheel)	m	2.2m
Lifting/drive motor	V/KW	24V/4.5Kw
Drive speed(stowed state)	Km/h	3.5Km/h
Drive speed(lifting state)	Km/h	0.8Km/h
Lifting speed	/	28/38sec
Battery	V/Ah	4X12V
Charger	V/A	100-240VAC 30A
Max. Gradeability	/	25%
Max. Allowable angle	。	X: $\pm 1.5^{\circ}$ /Y: $\pm 3^{\circ}$
Tire	mm	$\Phi 381 \times 127 \text{mm}$
Weight	Kg	2880Kg



Basic parameters	unit	GTJZ1414HD
Safe working load capacity	Kg	227Kg
Load capacity on the extension	Kg	113Kg
Max.number of workers	/	2
Max.Working height (A)	m	15.8m
Max. Platform height (B)	mm	13.8m
overall length (C)	mm	2840mm
overall width (D)	mm	1400mm
Overall height (unfolded guardrail)	mm	2595mm
Overall height (folded guardrail)) (E)	mm	2060mm
Working platform size (F)	mm	2640*1125mm
Platform extended size (G)	mm	900mm
Min. Ground clearance(stowed state)	mm	100mm
Min. Ground clearance(lifting state)	mm	20mm
Wheelbase	mm	1895mm
Turning radius(Inside wheel)	mm	0m
Turning radius (outside wheel)	m	2.2m
Lifting/drive motor	V/KW	24V/4.5Kw
Drive speed(stowed state)	Km/h	3.5Km/h
Drive speed(lifting state)	Km/h	0.8Km/h
Lifting speed	/	28/38sec
Battery	V/Ah	4X12V
Charger	V/A	100-240VAC 30A
Max. Gradeability	/	25%
Max. Allowable angle	°	X:±1.5° /Y:±3°
Tire	mm	Φ381X127mm
Weight	Kg	3400Kg

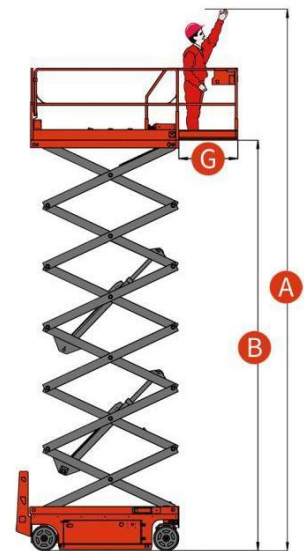

Basic parameters	单位	GTJZ1212HD
Safe working load capacity	Kg	320Kg
Load capacity on the extension	Kg	113Kg
Max.number of workers	/	2
Max.Working height (A)	m	13.8m
Max. Platform height (B)	mm	11.8m
overall length (C)	mm	2480mm
overall width (D)	mm	1190mm
Overall height (unfolded guardrail)	mm	2580mm
Overall height (folded guardrail)) (E)	mm	2050mm
Working platform size (F)	mm	2290*1120mm
Platform extended size (G)	mm	900mm
Min. Ground clearance(stowed state)	mm	100mm
Min. Ground clearance(lifting state)	mm	20mm
Wheelbase	mm	1895mm
Turning radius(Inside wheel)	mm	0m
Turning radius (outside wheel)	m	2.2m
Lifting/drive motor	V/KW	24V/4.5Kw
Drive speed(stowed state)	Km/h	3.5Km/h
Drive speed(lifting state)	Km/h	0.8Km/h
Lifting speed	/	28/38sec
Battery	V/Ah	4X12V
Charger	V/A	100-240VAC 30A
Max. Gradeability	/	25%
Max. Allowable angle	。	X: $\pm 1.5^{\circ}$ /Y: $\pm 3^{\circ}$
Tire	mm	$\Phi 381 \times 127 \text{mm}$
Weight	Kg	2880Kg

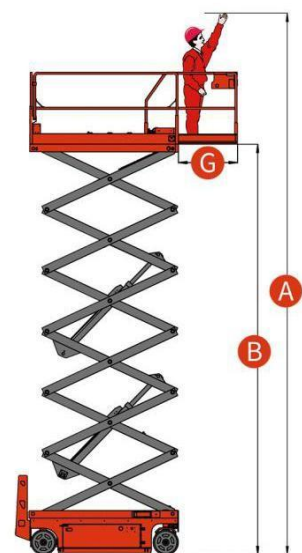

Basic parameters	unit	GTJZ1414HD
Safe working load capacity	Kg	227Kg
Load capacity on the extension	Kg	113Kg
Max.number of workers	/	2
Max.Working height (A)	m	15.8m
Max. Platform height (B)	mm	13.8m
overall length (C)	mm	2840mm
overall width (D)	mm	1400mm
Overall height (unfolded guardrail)	mm	2595mm
Overall height (folded guardrail)) (E)	mm	2060mm
Working platform size (F)	mm	2640*1125mm
Platform extended size (G)	mm	900mm
Min. Ground clearance(stowed state)	mm	100mm
Min. Ground clearance(lifting state)	mm	20mm
Wheelbase	mm	1895mm
Turning radius(Inside wheel)	mm	0m
Turning radius (outside wheel)	m	2.2m
Lifting/drive motor	V/KW	24V/4.5Kw
Drive speed(stowed state)	Km/h	3.5Km/h
Drive speed(lifting state)	Km/h	0.8Km/h
Lifting speed	/	28/38sec
Battery	V/Ah	4X12V
Charger	V/A	100-240VAC 30A
Max. Gradeability	/	25%
Max. Allowable angle	°	X:±1.5° /Y:±3°
Tire	mm	Φ381X127mm
Weight	Kg	3400Kg

